



Vertical Blind Installation & Maintenance Instructions

Thank you for purchasing this quality product. Please take a moment to review the following installation guide. Properly installed, your new product will provide you with years of beauty.

Overview :


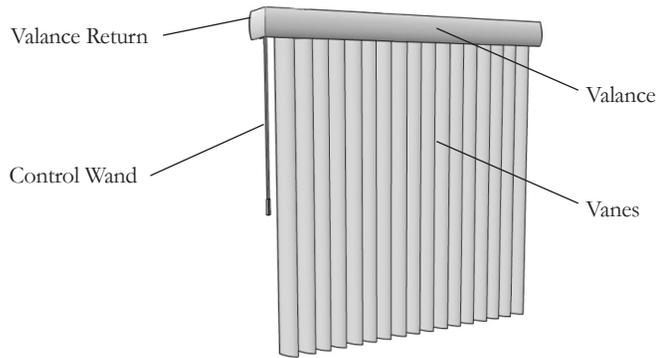


Recommended Tools :



Check the components :

Ensure that your package contains all of the contents needed for proper installation.

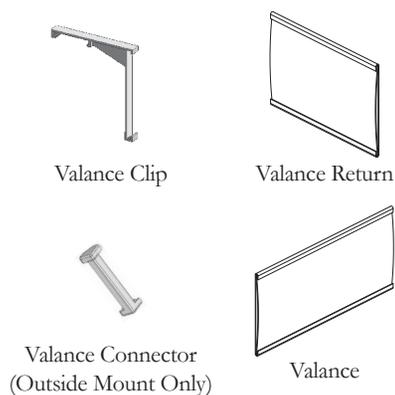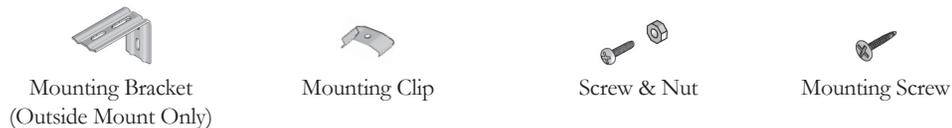


Blind Width	X ≤ 48"	48" < X ≤ 84"	84" < X ≤ 120"
Mounting bracket (Outside Mount Only)	2	3	4
Mounting Clip	2	3	4
Valance Clip	2	3	4
Valance Connector (Outside Mount Only)	2	2	2
Valance return (5" standard length)	2	2	2
Screw for Mounting bracket	4	6	8

*Note: after installing, please keep the redundant hardware for future using.

For Outside Mount, please use the Mounting bracket & Mounting Clip




Please adjust the position of mounting clip to front as below drawing before installing as Outside Mount.




For Inside/Ceiling Mount, please use the Mounting Clip only




Please take off the Mounting Clip from the Mounting Bracket as below drawing.

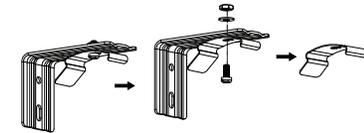


1: Position blind

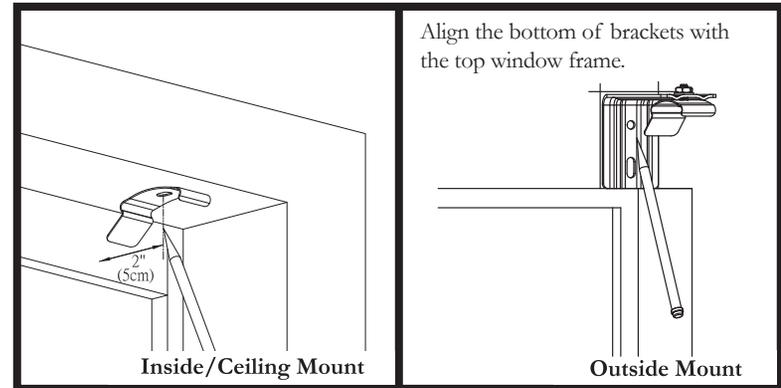


2: Attach brackets to wall or window moulding

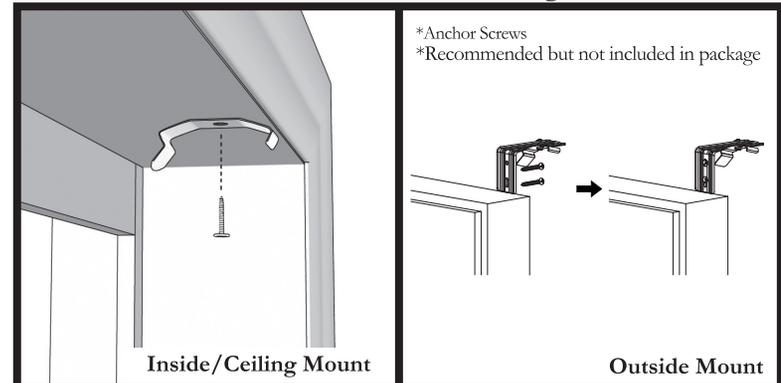


3: Attach valance clips

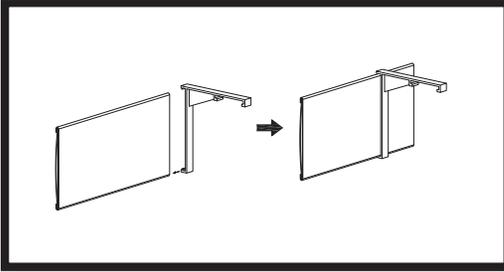


4: Attach valance to headrail



5: Attach track into bracket by inserting edge at top of track into front of clip and rolling track backward until rear clip snaps onto back top edge of track

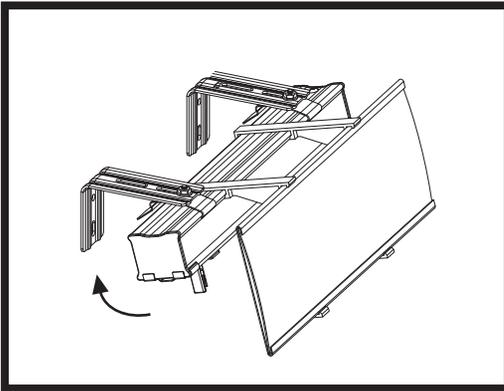


6: Insert Vanes in open position

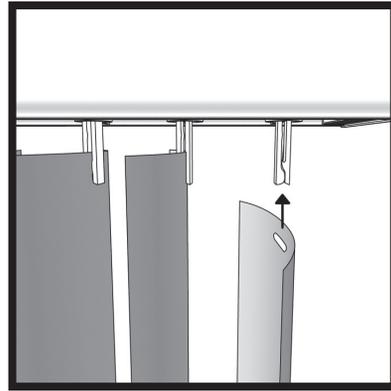


NOTE: All the tracks are reversible depending on which side you would like to locate your stacking and controls. Make sure to leave a 2" space between the installation screw on the release flange and the wall/window or any protruding handle or window frame.

7: Attach the Valance Connector and valance returns

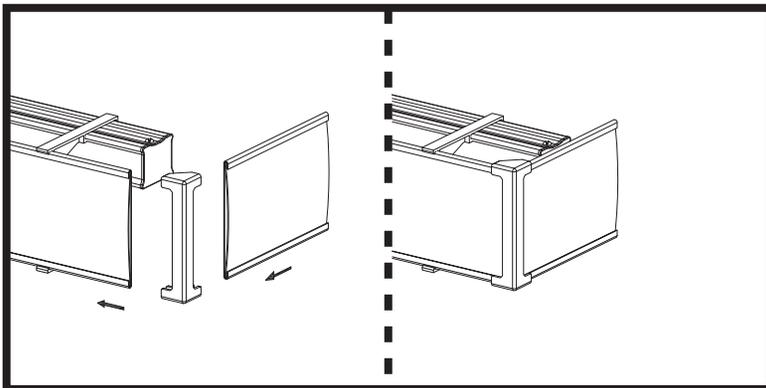


Operate your vertical blind

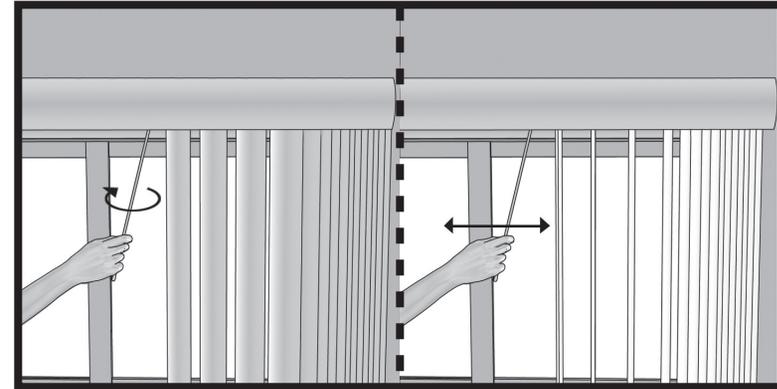


(Vanes) Auto-alignment Function


If the vanes are out-of-sync, turn the wand complete clockwise then counter clockwise. The vanes will return to its normal position.

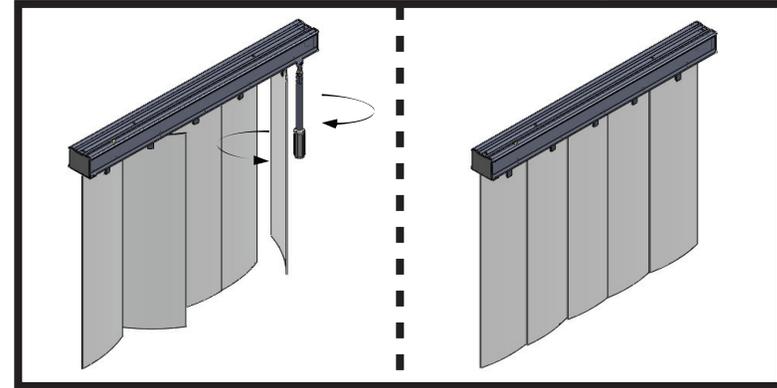

Remove your Vanes

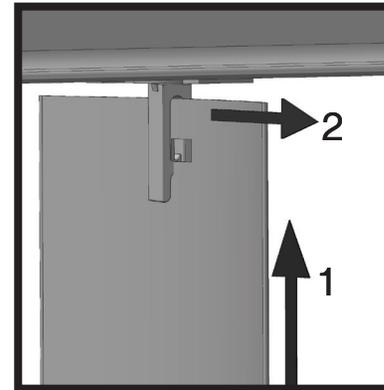

Maintenance for your vertical blinds

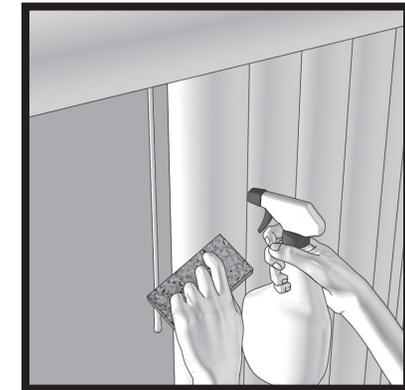

Care for Your Vertical Blinds:
PVC vanes can be cleaned with a damp cloth.