

Custom Specification

PerfectTilt G4 Motorized Shutters

Revision Log

Effective Date	Remark
2024/03/16	Change Invisible Tilt to InvisibleTilt®.
2024/03/20	Change Hub to ShadeAuto Hub, update information.
2024/04/19	Change content from All types except bi-fold double hung or panel with gap at bottom over 0.1" (no support on bottom). to All types except bi-fold double hung / single panel double hung without horizontal T post or panel with gap at bottom over 0.1" (no support on bottom).
2024/10/30	Change content from “** Group 4 and Group 5 are reserved for default settings. -If there's divider rail or split tilt: * Group 4 will be for all upper louver sections of all applicable shutters. * Group 5 will be for all lower louver sections of all applicable shutters. -If there's no divider rail or split tilt, Group 4 will be for all shutters.” to “** Group 4 and Group 5 are reserved for default settings. --For Non-Double Hung Shutters: * If there's no divider rail or split tilt, Group 4 will be for all shutters. * If there's a divider rail, no matter how many strings of louvers, Group 4 will be for all louver sections above the divider rail and Group 5 will be for all louver sections below the divider rail of all applicable shutters. * If there's no divider rail, but with a split tilt, Group 4 will be for all upper louver sections and Group 5 will be for all lower louver sections of all applicable shutters. * Except for the three points mentioned above, Group 4 will be for all louver sections of all applicable shutters in all other cases (such as when there are two or more divider rails / there's no divider rail, but the louver segment has 3 or more strings of louvers etc.) --For Double Hung Shutters: * No matter how many strings of louvers, Group 4 will be for all top section panels and Group 5 will be for all bottom section panels of all applicable shutters.”
2024/12/02	Panel size limit field adds content: approximate minimum panel height is 36" for all louvers;

Custom Specification


PerfectTilt G4 Motorized Shutters

1. New PerfectTilt™

The new PerfectTilt™ G4 has many exciting features & benefits.

- * Smart home & iOS / Android App control with ShadeAuto Hub (Optional)
- * Quick response to tilt commands
- * 8 pre-programmed louver positions and one custom position with remote. Over 30 custom louver positions by utilizing the Dial
- * Louvers can be tilted with the remote, through the app (via ShadeAuto Hub), or manually tilted by hand at any time, all without the need to flip switches, and without risk of damage because of incorrect switch settings.
- * Two long-lasting rechargeable 18650 Lithium-ion batteries per module unit last up to 1 year on a single charge via USB port
- * High efficiency solar panel included for extending battery charge
- * Water repellent module units
- * Built-in jam protection for child and pet safety

Parts and Names:

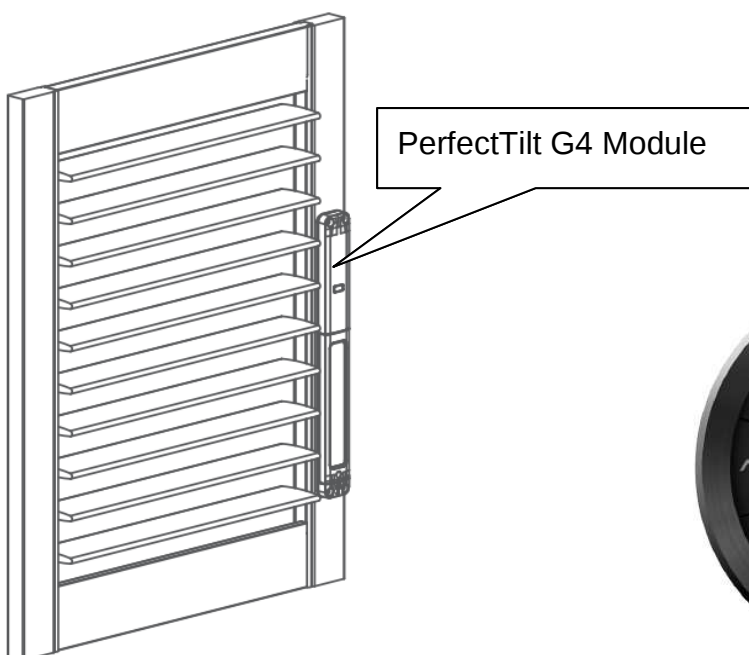

NORMAN SmartDial G2 (Remote)

Custom Specification

PerfectTilt G4 Motorized Shutters


Specifications:

	New RF	
Shutter Program	All Except Waterproof Woodlore Plus	
Shutter Type	All types except bi-fold double hung / single panel double hung without horizontal T post or panel with gap at bottom over 0.1" (no support on bottom).	
Specialty Shutter Shape	All shapes except shapes without a vertical stile in the middle (for example, eyebrow, elongated eyebrow, half-round sunburst without horizontal louvers)	
Tilt System	InvisibleTilt® only, the tilting system will not split unless specified	
Stile Width	2.25" stile only	
Louver	2.5", 3", 3.5", 4.5" Elliptical louver	
Panel Size Limit	Max. Panel Height without divider rail: 74" for Woodlore; 78" for Woodlore Plus, Brightwood and Normandy; Min. Panel Width Limit: 8 11/16" Max Width Limit: same as regular non-motorized shutters	
Panel Size Limit	Min. Panel Height With lined up Motors	18"(457.2mm) for 2.5"(63.5mm) / 3.5"(88.9mm) / 4.5"(114.3mm) louver; 21"(533.4mm) for 3"(76.2mm) louver; When corresponding to specialty shutters, except the panel height mentioned above, the moveable louvers Qty can't be less than 6pcs for 2.5"(63.5mm) / 3"(76.2mm) louver; 4pcs for 3.5"(88.9mm) louver; 3pcs for 4.5"(114.3mm) louver;
Panel Size Limit	Min. Panel Height With Staggered motors (which is default for 180 degree bifold track shutters; and optional for other types of shutters)	approximate minimum panel height is 36" for all louvers; Louver space not less than 26", so at least 13 louvers for 2.5" louver; 11 louvers for 3" louver; 9 louvers for 3.5" louver; 7 louvers for 4.5" louver.

Custom Specification

PerfectTilt G4 Motorized Shutters

Components:

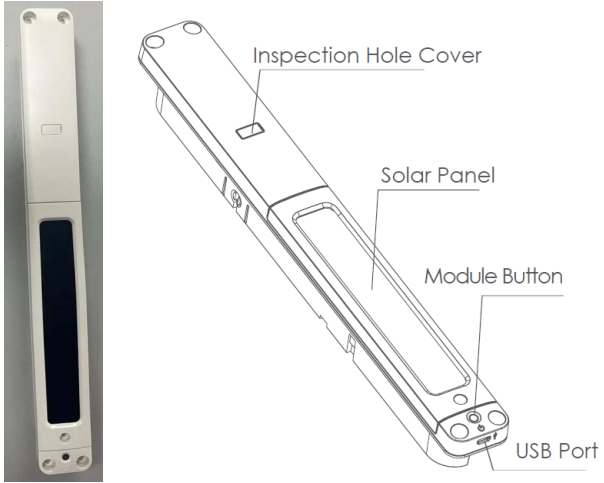Items	
NORMAN SmartDial G2 (Remote) and Docking: Radio Frequency; Battery: 2x CR2032 Dimensions : 67.6mm diameter x 21.2mm Default color ring's color: black Optional color ring's colors: White, Gray, Bronze, Red	
Module Model : PerfectTilt G4 Module color is White for shutter colors Pure White, Silk White & Pearl; Module color will be match shutter colors except Pure White, Silk White & Pearl. Dimensions : 13.09"(332.5mm) x1.52"(38.5mm) x1.45"(36.8 mm) One for each louver section, 2X long-lasting rechargeable 18650 lithium-ion batteries built-in, charge PerfectTilt G4 Module by Micro USB interface with 5V / 3A power bank or adaptor.	 To charge the batteries, use micro USB cord and plug it into either a wall outlet or a portable power bank. It may take up to 8 to 10 hours to fully charge the rechargeable batteries. DO NOT remove the batteries from the motor module unit. Once they are removed, it will void the warranty. In addition, only use Norman[®] supplied batteries on PerfectTilt[™] motors. The use of non-Norman[®] supplied batteries will also void the warranty.

Custom Specification

PerfectTilt G4 Motorized Shutters

Micro USB cable

Color: Black, Length: 9.8'(3 meters) ,
For charging PerfectTilt G4 Module.

One free Micro USB cable for every 3 motorized shutters by default.


If you need extra Micro USB cable, please input USB cable quantity when placing orders.



Slotted Point Driver

One for each louver section.

Connect the InvisibleTilt system to the Module:
when fitting the slotted point driver into the stile,
make sure the angle is the same as that of the
louvers.

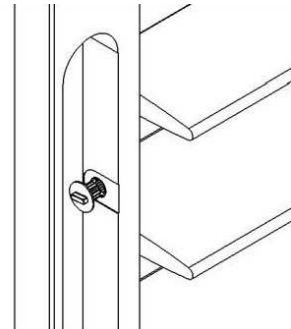

ShadeAuto Hub Color: Black

Dimensions: 3.7"(94mm) diameter x
1.09"(27.8mm)

Micro USB cable Color: Black

Connect the Smart phone and the ShadeAuto
Hub, all shutters assigned to the remote can be
controlled by app via ShadeAuto Hub

It is recommended that one ShadeAuto Hub be
installed on each floor/level.



Repeater Color: black

Plug Repeater into the enclosed Power Adapter
and then plug into home power supply.

It is recommended to deploy each room with a
repeater; If the distance is more than 32.8'(10
meters), add one more repeater.



Custom Specification
PerfectTilt G4 Motorized Shutters

For your convenience, when ordered at the same time, the remote, hub and motor will be paired at the factory. A single remote can only be paired with 90pcs modules via a single hub.

****Group 1, 2 and 3:**

-Factory default:

- * Windows on the right wall: Group 1
- * Windows on the center wall: Group 2
- * Windows on the left wall: Group 3

-Custom:If your desired pairing is different from the factory's default, specify at the time of ordering.

**** Group 4 and Group 5 are reserved for default settings.**

--For Non-Double Hung Shutters:

- * If there's no divider rail or split tilt, Group 4 will be for all shutters.
- * If there's a divider rail, no matter how many strings of louvers, Group 4 will be for all louver sections above the divider rail and Group 5 will be for all louver sections below the divider rail of all applicable shutters.
- * If there's no divider rail, but with a split tilt, Group 4 will be for all upper louver sections and Group 5 will be for all lower louver sections of all applicable shutters.
- * Except for the three points mentioned above, Group 4 will be for all louver sections of all applicable shutters in all other cases (such as when there are two or more divider rails / there's no divider rail, but the louver segment has 3 or more strings of louvers etc.)

--For Double Hung Shutters:

- * No matter how many strings of louvers, Group 4 will be for all top section panels and Group 5 will be for all bottom section panels of all applicable shutters.


Note: Please select the shutters will be installed on right / center / left wall when placing orders, then the groups will be programmed well at factory.

Custom Specification

PerfectTilt G4 Motorized Shutters


Frame Cut-Out

For single panel or configuration similar to single panel with frame, the module location will conflict with the light block of the frame, so there will be cut-out on the light block of the frame to stop the conflict, the length for the cut-out would be 335mm (13.2").

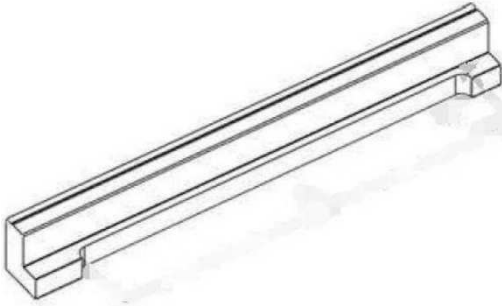

Clearance:


The module will protrude 5/8" from the back of the stile, please allow 11/16" clearance for the module.

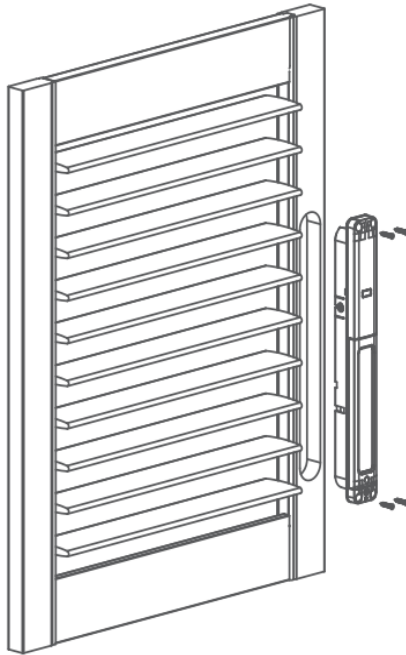

Module Location: (InvisibleTilt® will be on the same side as the module)

For regular shutters and bi-fold Applications (Except for 2014 bifold track):


- 1) Single Panel: Module will be on the un-hinge stile
- 2) 2 Panels: LL, LR, RR

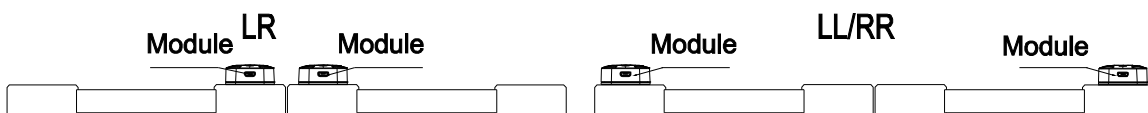


Custom Specification

PerfectTilt G4 Motorized Shutters

3) 3 Panels: LLL/RRR

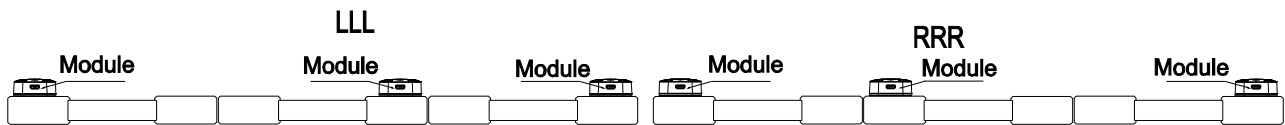


4) 4 Panels: LLRR/LLLL/RRRR

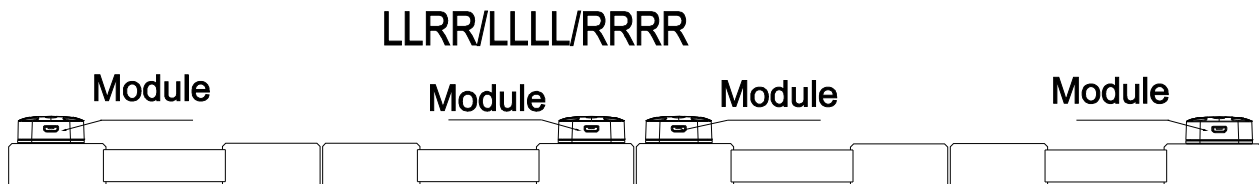


Given the need for module clearance, the following OM install frames will require either a build out or extension of at least 1/2" (12.7mm) when the modules must be located on the outermost stiles as outlined above:

1. Hang Strip (beside the panels)
2. L Frames with a light block thickness of less than 3/4" (19mm) installed flush with the window opening
3. All Deco Frames where the light block is installed flush with the window opening

Hang Strip

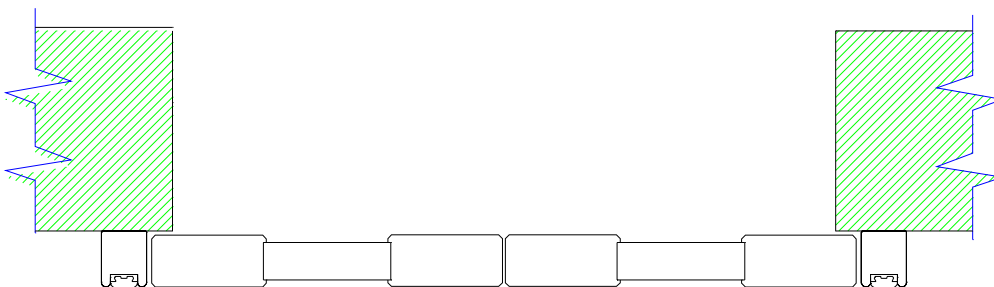


L Frames with a light block thickness less than 3/4" (19mm) flush with the window opening

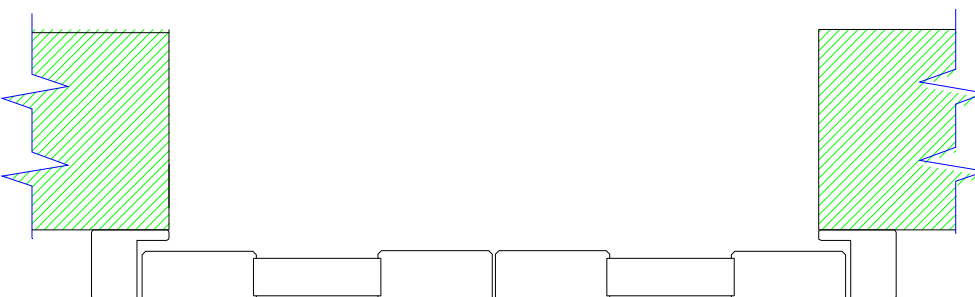


Custom Specification

PerfectTilt G4 Motorized Shutters

All Deco Frames with the light block flush with the window opening:

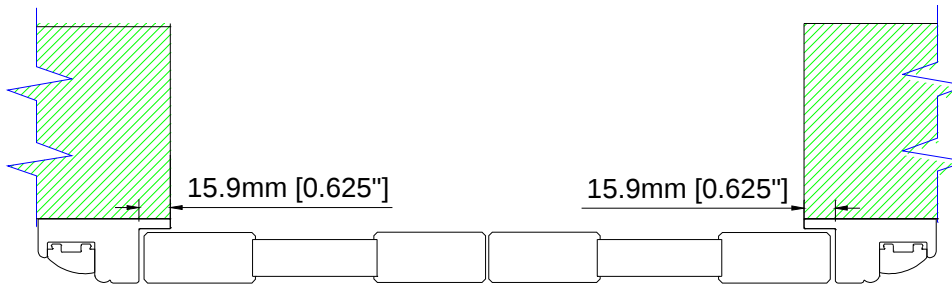

Side view for module in panel with different louver types

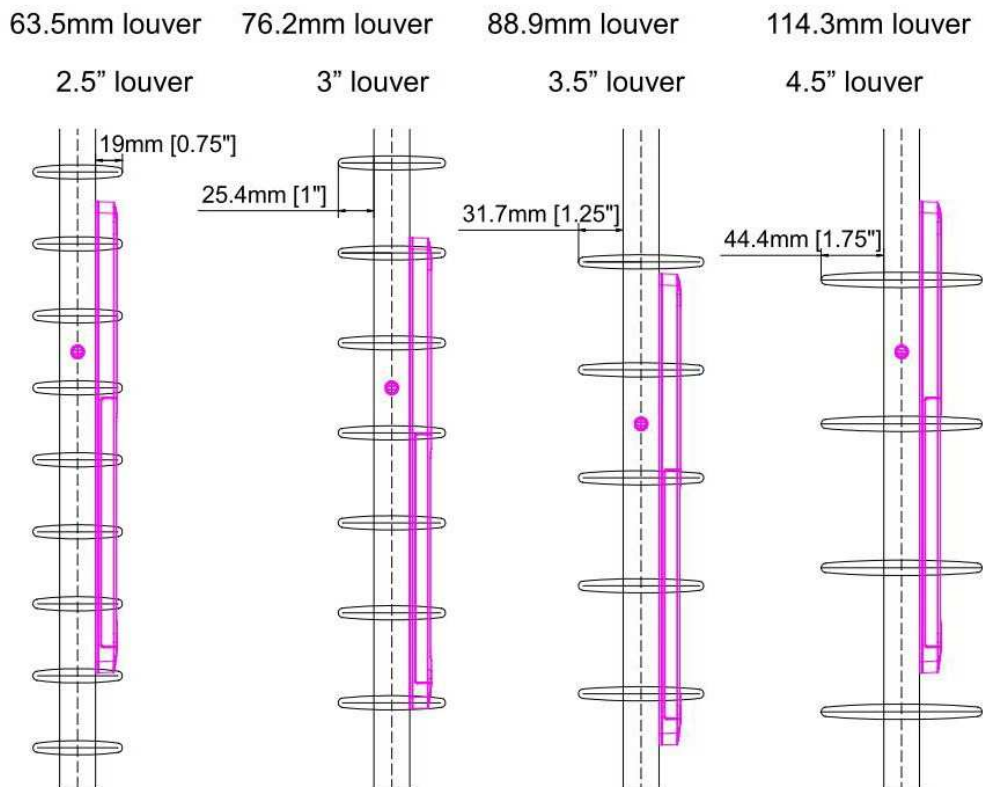


For Motorized 90° Bifold Track Shutter:

- 1) Both 76.2mm (3") and 88.9mm (3.5") Header are available;
- 2) The L Shape Light Block will be cut out 7.9mm (5/16") to avoid the conflict with the module;


Custom Specification

PerfectTilt G4 Motorized Shutters

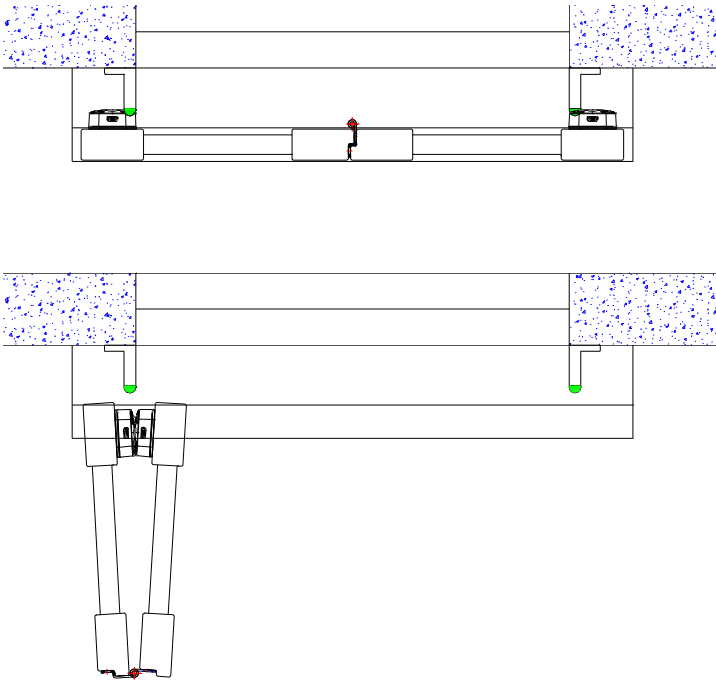



For Motorized 180° Bifold Track Shutter:

- 1) The default header width is 88.9mm (3.5"); The min. Header width is 82.5mm (3.25"); so for 76.2mm (3") header, 6.35mm (0.25") extension is required.
- 2) The L Shape Light Block will be cut out 4mm (3/16") to avoid the conflict with the module; 5.1mm (0.2") extension is necessary for installation of the top and bottom pivots;

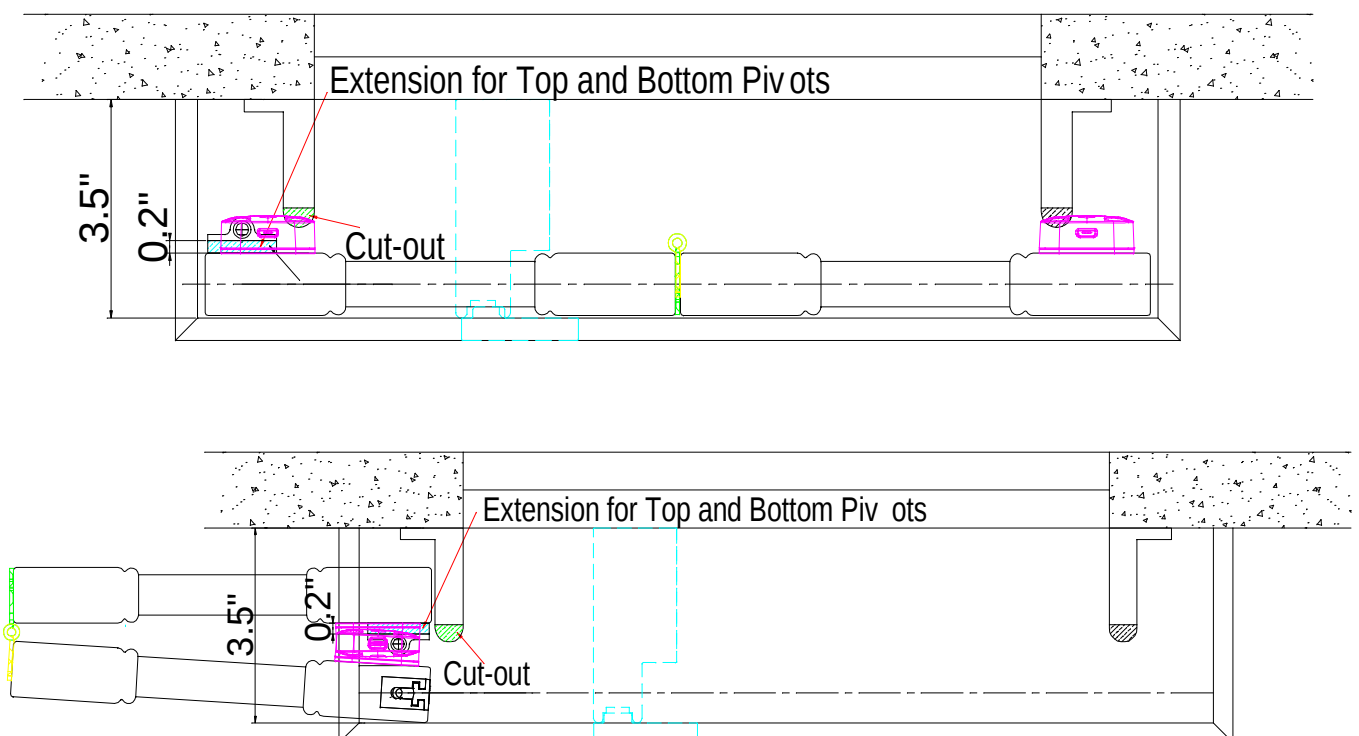


Custom Specification

PerfectTilt G4 Motorized Shutters

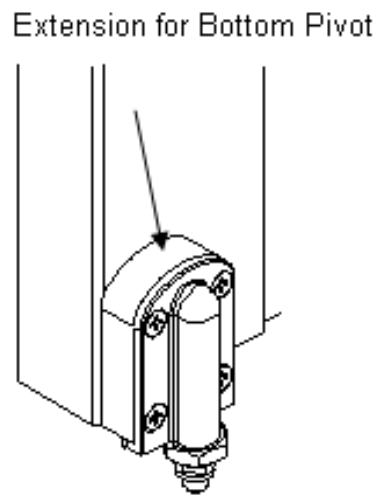
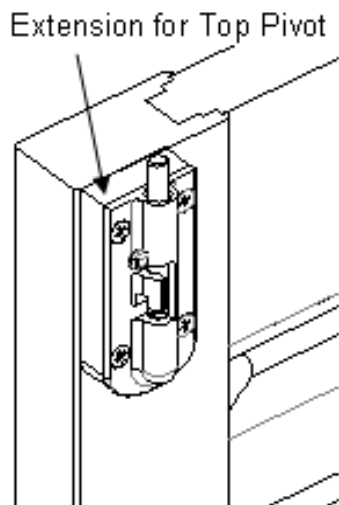


For 90° Bifold Track:


LL/RR

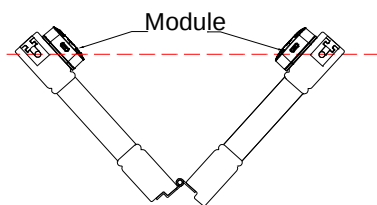


LLRR

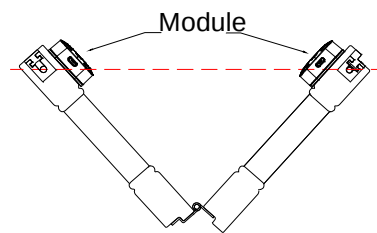

LLL

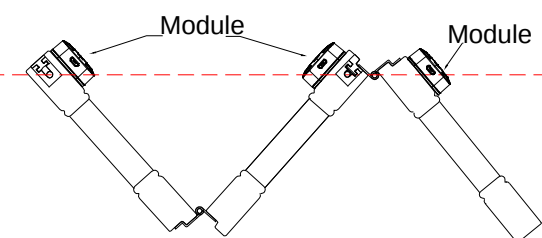


RRR

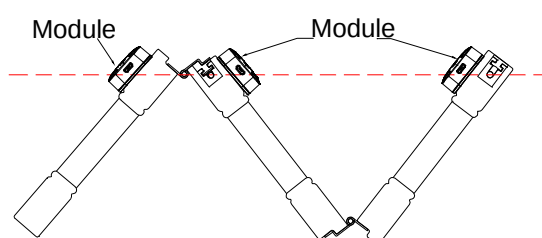


Custom Specification

PerfectTilt G4 Motorized Shutters

LLLL

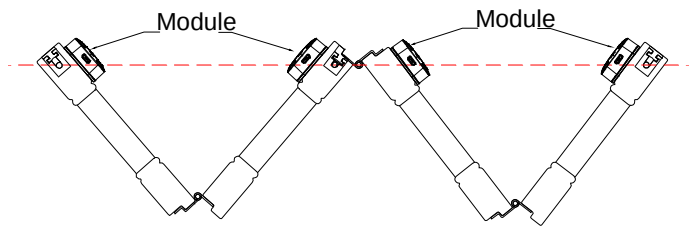

RRRR

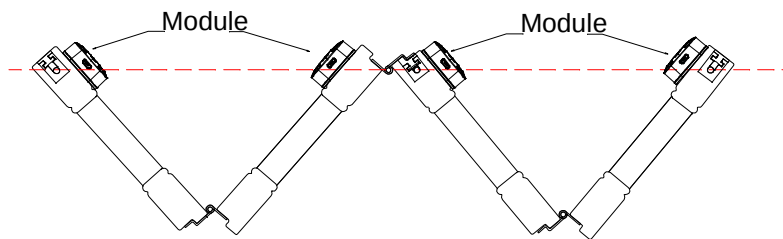

Special Note on Bi-fold or Multi-fold Configurations

Please be aware that in bi-fold or multi-fold configurations of RF, the motorization modules will touch each other when the panels are folded together, so the panels can't be able to stack together as tightly as that of the non-motorized shutters.


Additionally, before folding the bi-fold or multi-fold panels together, please ensure that the louvers are returned to a completely closed position (either up or down) to prevent louver damage when folding panels.

For better fold, it is optional to have the modules staggered for bi-fold/multi-fold shutters.

However, for 180° bi-fold track shutter, the modules can only be staggered.


Custom Specification

PerfectTilt G4 Motorized Shutters

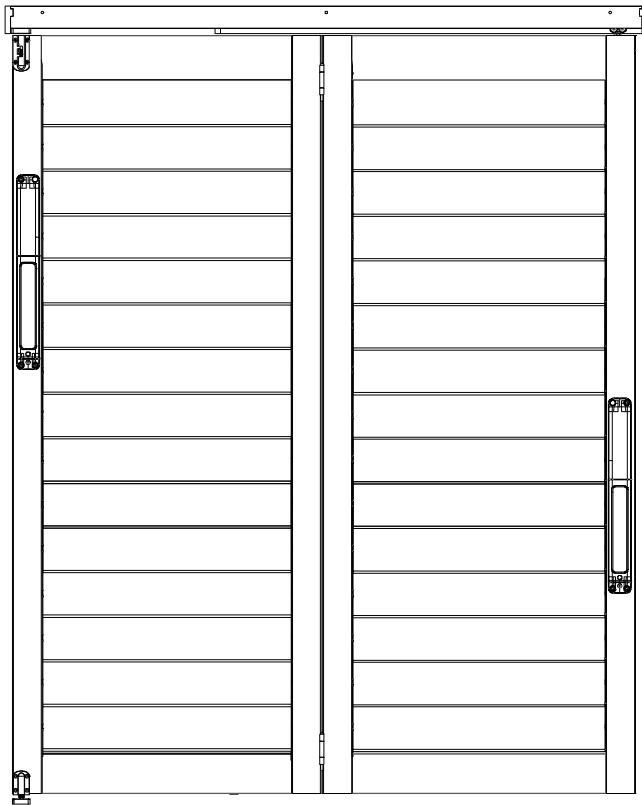


For By-Pass Application


2 panels side open

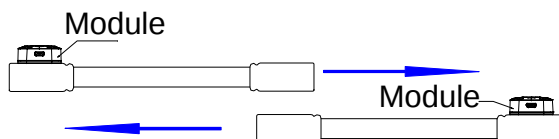

3 panels center open front (not available for Open Bypass)

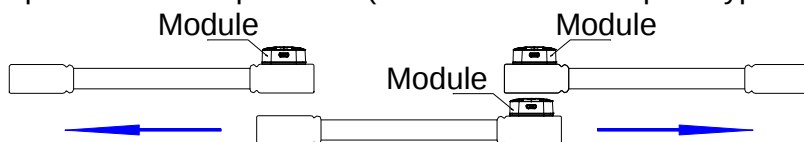


3 panels center open back (not available for Open Bypass)

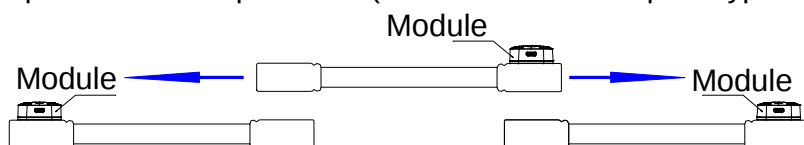


Custom Specification

PerfectTilt G4 Motorized Shutters


4 panels center open front

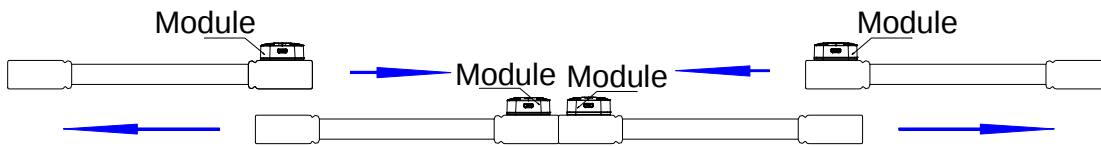


4 panels center open back

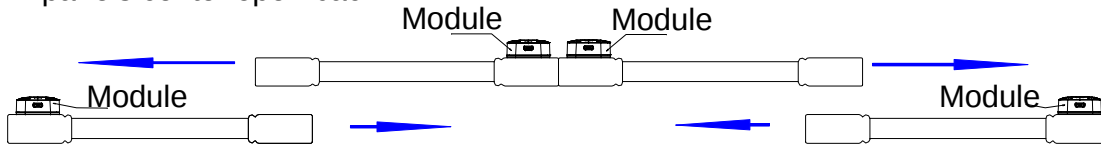


4 panels side open

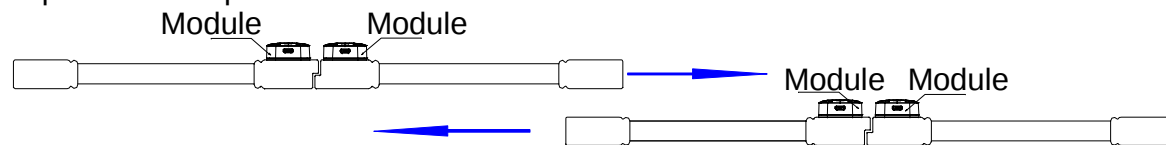


6 panels center open front




6 panels center open back



6 panels side open-right over left




6 panels side open-left over right




Custom Specification

PerfectTilt G4 Motorized Shutters


8 panels center open front




8 panels center open back



8 panels side open -right over left



8 panels side open- left over right




For Special Shape Application:


Module location will be the same as the InvisibleTilt® location.

SHUTTER LOOK FROM FRONT AND BACK

The front side of the shutter

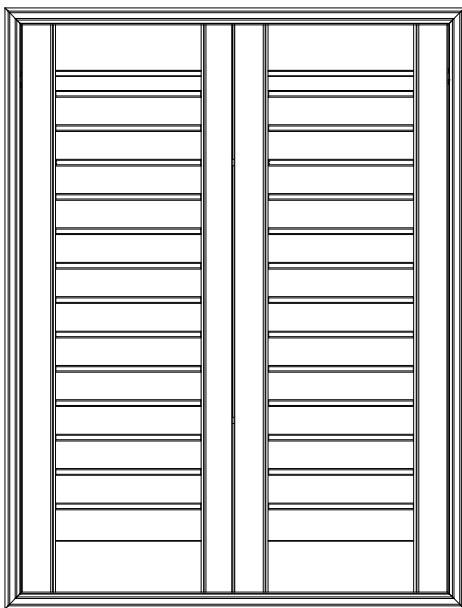

The back side of the shutter

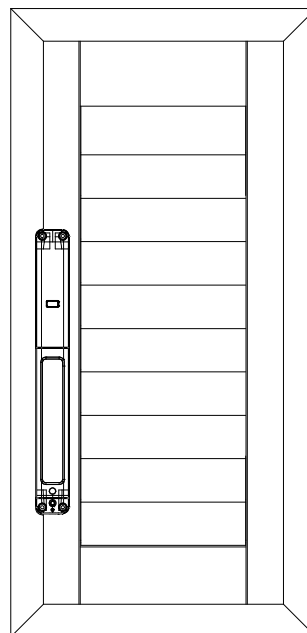

* No Receiver / Louver Cap

* InvisibleTilt® only

* The light block would be cut out along the module.